

1745

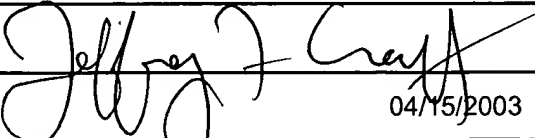
PTO/SB/21 (08-00)
Approved for use through 10/31/2002. OMB 0651-0031
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM <i>(to be used for all correspondence after initial filing)</i>	Application Number	09/575,237
	Filing Date	05/22/2000
	First Named Inventor	Akashi
	Group Art Unit	1745
	Examiner Name	C. Chaney
Total Number of Pages in This Submission	Attorney Docket Number	09792909-0336

RECEIVED
APR 22 2003
TC 1700

ENCLOSURES (check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Assignment Papers (for an Application)	<input type="checkbox"/> After Allowance Communication to Group
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input checked="" type="checkbox"/> Amendment / Reply	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input checked="" type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Terminal Disclaimer	Acknowledgement Postcard
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Request for Refund	
<input type="checkbox"/> Certified Copy of Priority Document(s)	<input type="checkbox"/> CD, Number of CD(s) _____	
<input type="checkbox"/> Response to Missing Parts/ Incomplete Application	Remarks	
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual name	SONNENSCHN NATH & ROSENTHAL
Signature	
Date	04/15/2003

CERTIFICATE OF MAILING			
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, Washington, DC 20231 on this date: 04/15/2003			
Typed or printed name	Kathleen Gaines		
Signature		Date	04/15/2003

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



Docket No. 9792909-0336

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

U.S. Patent Application of:
Akashi *et al.*

Serial No.: 09/575,237

Filed: May 22, 2000

For: **SOLID ELECTROLYTE BATTERY**

Examiner: C. Chaney

Group Art Unit: 1745

#17
42532
RECEIVED
APR 22 2003
TC 1700

RESPONSE

In response to the outstanding office action dated January 15, 2003, please consider the following remarks.

Independent claim 1 and dependent claims 2-10 are currently pending. Claim 1 recites a solid electrolyte battery 1 that includes a positive electrode 2, a negative electrode 3, and a separator 5 having opposing first and second surfaces, disposed between the positive electrode and the negative electrode. The solid electrolyte battery also includes a solid electrolyte layer 4 disposed adjacent to the first separator surface between the positive electrode 2 and the separator 5 and another solid electrolyte layer 4 disposed adjacent to the second separator surface between the separator and the negative electrode 3. The separator is made of a polyolefin porous film having a thickness not less than 5 μm nor greater than 15 μm and a porosity not less than 25 % nor greater than 60 %.

Significantly, the impedance in the solid electrolyte battery is higher at a temperature not less than 100° C nor greater than 160° C than the impedance at room temperature. A description of one process that can be used to make separators having the claimed combination of properties, a solvent process, is found in the instant application, beginning at page 20, line 12.

The examiner rejected claims 1-10, all the claims, under 35 U.S.C. § 103(a) as obvious in light of Pendalwar *et al.* Reconsideration is respectfully requested. Nothing in Pendalwar *et al.* would have suggested a solid electrolyte battery that has both (1) a polyolefin film separator having a thickness of not less than 5 μm nor greater than 15 μm and a volume porosity of not

lower than 25 % nor higher than 60 % and (2) an impedance that is higher at a temperature not less than 100° C nor greater than 160° C than the impedance at room temperature.

In particular, applicants disagree with the examiner's assertion that, "In a preferred embodiment, the commercially available material Celgard 2300, was used as the inert separator." Instead, Pandalwar *et al.* teaches that, "In the preferred embodiment of the instant invention, the first polymer region [*i.e.*, the separator] is actually a *multilayered* polymer region comprising two or more different polymers. In the embodiment of FIG 2, the first region comprises *three* polymer layers . . ." (Emphasis added, col. 4, lines 25-29.)

As explained by Pandalwar *et al.*, it is a trilayered structure that provides shut down protection :

"An advantage of the instant system is that the layers of the first region when heated above a threshold temperature, of example about 135 degrees Centigrade (°C.) for *polyethylene*, the material melts and fuses essentially choking off all ionic conductivity. . . . The benefit of providing the sandwiching layers of. [sic] for example, polypropylene, is to assure a continued electrical an physical barrier between the electrodes . . . Polypropylene remains relatively intact up to about 165° C." (Col. 4, line 59-col. 5, line 7, emphasis added.)

Such a trilayered structure would not have suggested a solid electrolyte battery that has a polyolefin film separator having a thickness of not less than 5 µm nor greater than 15 µm and a volume porosity of not lower than 25 % nor higher than 60 % and that has an impedance that is higher at a temperature not less than 100° C nor greater than 160° C than the impedance at room temperature.

In the section entitled examples, Pandalwar *et al.* describes the preparation of a cell containing a single layer of Celgard® 2300, a conventional polypropylene material. However, this example is not of a preferred embodiment, but of a comparative example. In FIG. 5, Pandalwar *et al.* reports, "Results for the trilayer and the conventional polypropylene materials" and states that "Shutdown" in the trilayer occurs at a much lower temperature (*i.e.* 135° C)" (Col. 6, lines 15-19.) This temperature is much lower than the temperature of 165° C which Pandalwar *et al.* teaches is the temperature at which conventional polypropylene begins to melt.

Applicants' understanding of the properties of the comparative example described in Pandalwar *et al.* is consistent with the description of Celgard products contained in US 6,322,923, the Lundquist *et al.* patent cited by the examiner in the previous office action. Lundquist *et al.* generally describes the properties of microporous membranes made by the Celgard process, a dry stretch process. Lundquist *et al.* then goes on to identify a number of patents that describe microporous membranes that can function as shut down separators. The patents appear to describe multilayer separators.

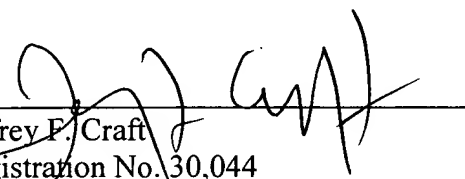
Therefore, Pandalwar *et al.* would not have suggested a solid electrolyte battery that has a polyolefin film separator having a thickness of not less than 5 μm nor greater than 15 μm and a volume porosity of not lower than 25 % nor higher than 60 % and that has an impedance that is higher at a temperature not less than 100° C nor greater than 160° C than the impedance at room temperature, so that the rejection of claims 1-10 under 35 U.S.C. § 103(a) as obvious in light of Pandalwar *et al.* should be withdrawn.

CONCLUSION

In light of the foregoing amendments, remarks, and substitute specification, it is believed that the application is in condition for allowance, so that a prompt and favorable response is earnestly requested.

Respectfully submitted,


SONNENSCHN NATH & ROSENTHAL

By: 
Jeffrey F. Craft
Registration No. 30,044

SONNENSCHN NATH & ROSENTHAL
P.O. Box # 061080
Wacker Drive Station
Sears Tower
Chicago, IL 60606-6404
(213) 623-9300

I hereby certify that this document and any fee being referred to as attached or enclosed is being deposited with the United States Postal Service as first class mail in an envelope addressed to Assistant Commissioner for Patents, Washington, D.C. 20231, on

April 15, 2003
Date


Kathleen Gaines